

HC16 Hydraulic Oil Cooler

Technical brochure

Hydraulic oil cooler 12V or 24V DC

- Constructed in a lightweight aluminium
- Specially designed with 25L oil tank
- Simple installation
- Low maintenance



www.transairvac.com

Unit 28,
Croft Road
Industrial Estate,
Newcastle-Under-
Lyme

Staffordshire

ST5 0TW

01782 710282

www.transairvac.com



BELLIN
THE POWER OF EXPERIENCE
Since 1950's



SAMSON PUMPS




Hydraulic Oil Cooler

Technical Specifications

Other Transairvac products include:

- Knife gate valves
- Pressure line filters
- Compressors
- Vacuum pumps
- Blowers
- Rotary lobe pumps
- Parker Hydraulics

	HC16 Cooler
Hydraulic flow rate	120LT/min (140LT/min Max)
Hydraulic pressure	15 Bar (Max)
Air flow	1950 M ³ /hr
Oil tank capacity	25LT
Dry weight	26KG
Fan options	12V or 24V

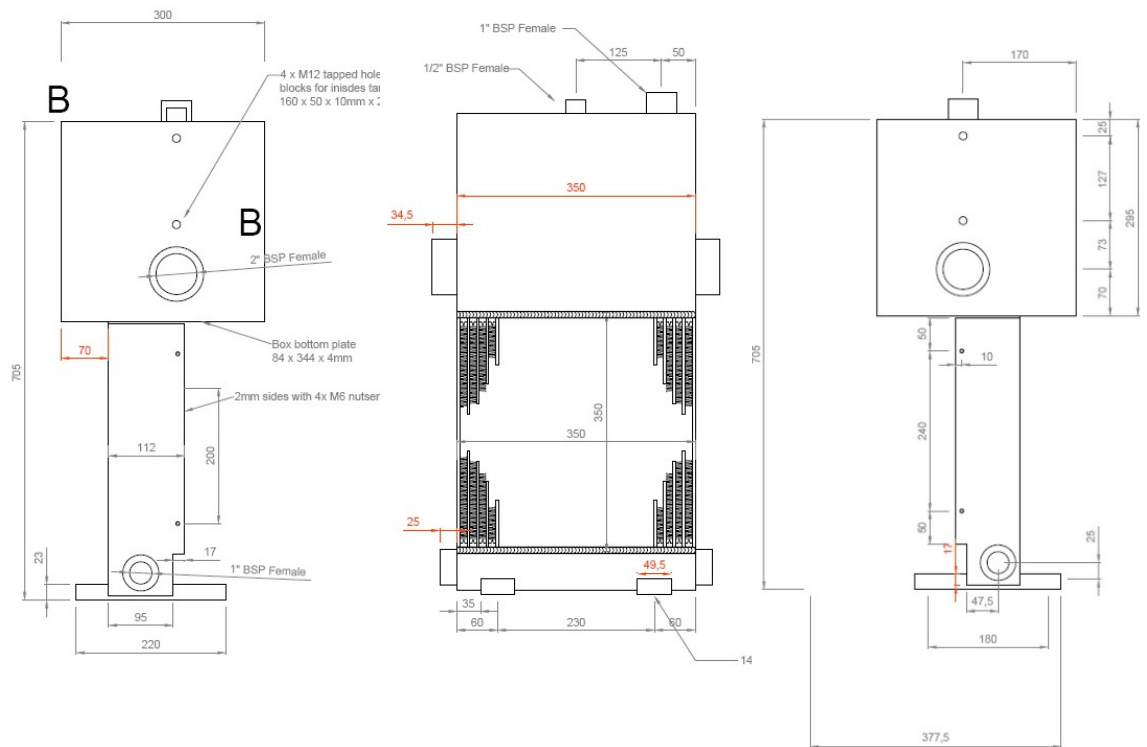

Unit 28,

Croft Road Industrial Estate,

Newcastle-Under-Lyme

Staffordshire

ST5 0TW

01782 710282

www.transairvac.com

