

T155 COMPACT TANKER COMPRESSOR

The next generation of Compressors for liquid tanker pressure discharge

This is a contactless liquid tanker compressor, giving unparalleled performance in a virtually maintenance free unit. The compressor is available with hydraulic drive, making it adaptable to position on limited space tractor units.


The T155 uses the hook and claw principle to generate 2.5 Barg pressure. This delivers real performance with first class reliability.

Product features

- Contactless oil free (no vanes)
- Precision engineered
- Virtually maintenance free
- Low noise – 92 dB(A) @ 1m
- Optimal discharge times
- Air cooled
- Oil free

Only available

- Hydraulic drive

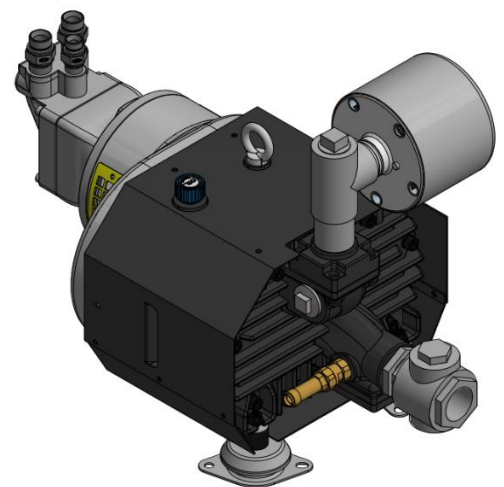

TRANSAIRVAC

www.transairvac.com



T155 COMPRESSOR

TECHNICAL SPECIFICATIONS


Performance

Flow Range	Pressure	Speed	Absorbed Power at 2.5 Barg
m ³ /hr	bar	rpm	kW
150	2.5	3000	9.5
180	2.5	3600	10.8

Hydraulic Requirement	Pressure 120 bar	Flow 60 lt/min @ 3000 rpm 70 lt/min @ 3600 rpm
-----------------------	------------------	---


T155 Dimensions

Weight: 90kg

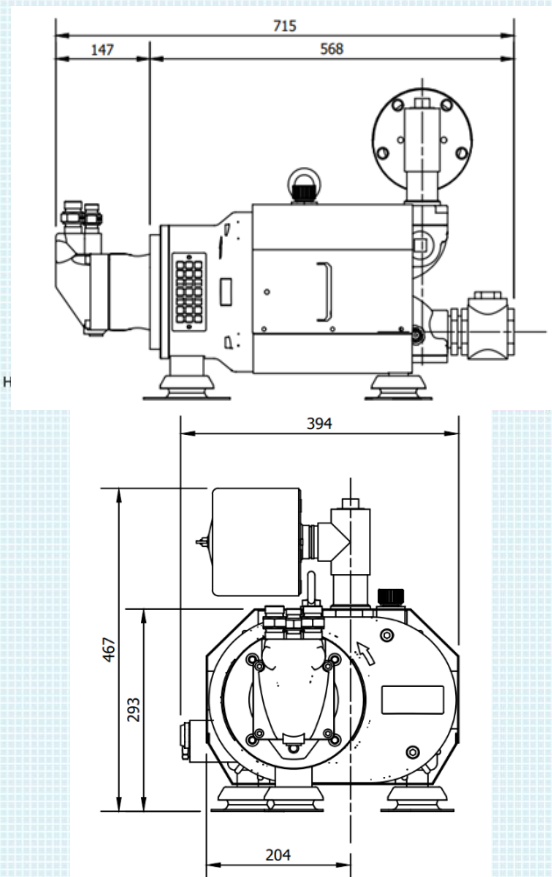

FEATURES

- Contactless (vane free) compressor
- Oil free
- 2.5 Barg continuously rated
- Air Cooled
- Low maintenance
- Low noise 92 dB(A) @ 1m
- 150 – 180 m³/hr
- Weight 90 kg
- Hydraulic drive

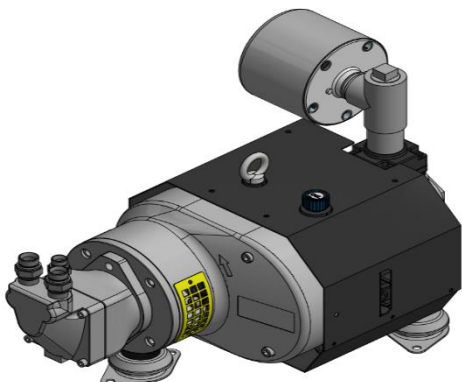

Other Transairvac products include:

- Hydraulic coolers
- Pressure line filters
- Compressors
- Vacuum pumps
- Blowers
- Rotary lobe pumps

TRANSAIRVAC
INTERNATIONAL LTD

Units 28, Croft Road Industrial Estate, Newcastle,
Staffordshire ST5 0TW England

Tel: +44 (0)1782 710282

mail: office@transairvac.com

web: www.transairvac.com